



## SLL100

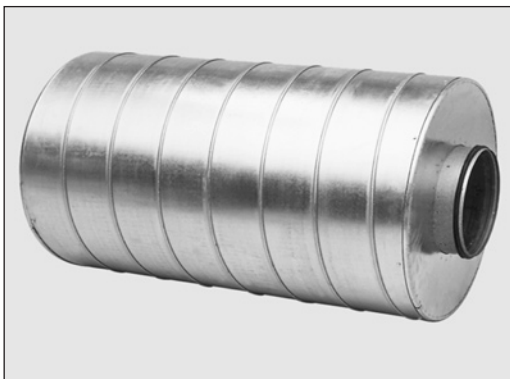

Lyddæmper med isoleringstykkelse på 100mm .

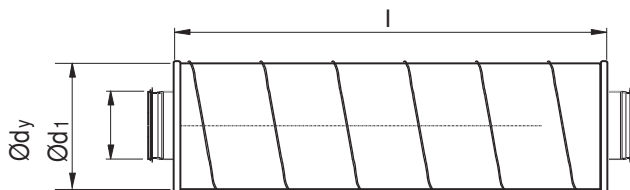

Ød <sub>1</sub> nom	l mm	Indsætningsdæmpning (dB) i oktavnåb								Ød <sub>y</sub> mm	m kg
		63	125	250	500	1k	2k	4k	8k		
200	300	1	5	7	19	12	14	12	9	400	5,6
200	600	2	7	11	17	23	22	14	11	400	9,1
200	900	3	9	15	23	32	35	17	13	400	12,6
200	1200	4	12	18	26	46	45	28	22	400	16,2
250	600	3	5	10	16	20	16	9	7	450	10,7
250	900	4	6	14	24	30	24	14	10	450	14,7
250	1200	5	7	17	31	45	32	18	13	450	18,8
315	600	2	4	10	12	17	14	8	6	500	12,8
315	900	2	5	13	20	25	21	11	9	500	17,4
315	1200	3	7	17	27	33	28	15	12	500	22,1
355	600	1	3	9	11	12	7	5	4	560	15,0
355	900	2	5	11	16	19	14	8	7	560	20,4
355	1200	3	6	14	22	26	20	11	10	560	25,7
400	600	1	4	10	12	14	7	6	5	600	16,2
400	900	2	5	12	19	20	14	8	8	600	22,0
400	1200	3	6	13	23	27	18	11	10	600	27,8
450	600	1	4	8	12	14	7	5	5	630	19,1
450	900	2	5	11	16	16	8	6	5	630	26,3
450	1200	3	6	12	21	23	13	8	8	630	33,4
500	600	1	4	6	12	13	6	4	4	710	22,8
500	900	3	6	12	20	18	8	6	5	710	31,1
500	1200	3	7	12	23	25	11	8	7	710	39,4
560	600	1	3	7	13	11	5	4	4	800	26,6
560	900	3	5	11	20	15	7	5	4	800	36,3
560	1200	3	6	11	20	18	8	6	5	800	46,0
630	900	2	3	8	16	6	3	3	3	800	38,3
630	1200	2	3	10	19	10	4	3	3	800	47,5
710	900	2	3	9	13	5	2	3	2	900	44,5
710	1200	2	3	10	17	9	3	3	3	900	55,6
800	1200	3	3	10	15	7	3	3	4	1000	70,0

## Ordre eksempel

SLL100	315	900	100
Produkt			
Dimension Ød1			
Længde l			
Isoleringstykkelse			

Lyddæmper leveres med fastmonterede nipler i begge ender.